


60 Watt Medical (MWLT)

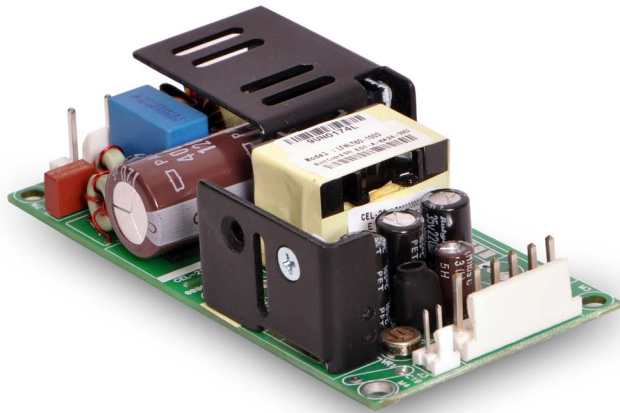

Features

- 4 x 2 x 1.2 inches
- Ultra high efficiency > 85%
- 50–65 W from 1 to 3 outputs
- Low leakage current < 250 μ A
- Nemko, UL & CSA approvals to IEC60601
- EN55022-B, CISPR22-B, FCC Part15 Level B, IEC60601-1-2
- No Load Power < 0.3 W
- Class I & Class II options
- Cover kit accessory available
- Meets standard IEC60601-1-2 : 2014 (4th Edition)

Electrical Specifications

AC Input	90–264 V, Universal	
Input Frequency ⁵	47–400 Hz	
Input Current	120 VAC: 1.5 A max.	230 VAC: 0.75 A max.
No Load Power	< 0.3 W for single output models; < 0.5 W for multi output models	
Inrush Current	120 VAC: 30 A max.	230 VAC: 60 A max.
Leakage Current	120 VAC: < 140 μ A	230 VAC: < 250 μ A
Efficiency ¹	120 VAC: 85% typical	230 VAC: 85% typical
Hold-up Time	>10 ms @ 120 VAC typical	
Output Power	50–65 W	
Line Regulation	+/-0.3%	
Load Regulation	V1: +/-0.5%; V2 & V3: +/-5%	
Transient Response	< 10%, 50% to 100% load change, 50/60 Hz, 50% duty cycle, 0.1 A/ μ s, recovery time < 5 ms	
Rise Time	< 100 ms	
Set Point Tolerance	V1: +/-3%; V2 & V3: +/-5%	
Output Adjustability	V1: +/-10%	
Over Current Protection	130% typical above rating	
Over Voltage Protection	130% typical for V1 only	
Short Circuit Protection	Short term, autorecovery	
Switching Frequency	Approximately 67 kHz	
Operating Temperature	-20 to 70°C, refer derating curve; -20 to 0°C, start-up is guaranteed	
Storage Temperature	-40 to +85°C	
Relative Humidity	95% Rh, noncondensing	
Altitude	Operating: 10,000 ft.; Nonoperating: 40,000 ft.	
MTBF	1.87m Hours, Telcordia -SR332-issue 3	
Isolation Voltage	Min. 5700 VDC between input to output, 2MOPP; 1500 VAC input to ground, 1MOPP; 500 VAC output to ground	
Cooling	Convection	

Model Number	Voltage	Max. Load ²	Min. Load ⁶	Ripple ³
LFMWLT60-1000	V1=5.1 V	10.0 A	0.0 A	1%
LFMWLT60-1001	V1=12 V	5.4 A	0.0A	1%
LFMWLT60-1002	V1=15 V	4.33 A	0.0 A	1%
LFMWLT60-1003	V1=24 V	2.7 A	0.0 A	1%
LFMWLT60-1004	V1=48 V	1.35 A	0.0 A	1%
LFMWLT60-3000	V1=5.2 V, V2=12.5 V, V3=-12.8 V	V1=8.0 A, V2=3.0 A, V3=0.5 A	V1=0.5 A, V2=0.1 A, V3=0.0 A	1%
LFMWLT60-3001	V1=5.2 V, V2=24 V, V3=-12.8 V	V1=8.0 A, V2=1.5 A, V3=0.5 A	V1=0.5 A, V2=0.1 A, V3=0.0 A	1%
LFMWLT60-3002	V1=5.2 V, V2=14.6 V, V3=-14.8 V	V1=8.0 A, V2=2.5 A, V3=0.5 A	V1=0.5 A, V2=0.1 A, V3=0.0 A	1%
LFMWLT60-3003	V1=3.3 V, V2=5.2 V, V3=-12.8 V	V1=6.0 A, V2=3.0 A, V3=0.5 A	V1=1.0 A, V2=0.1 A, V3=0.0 A	V1=1.5%, V2 & V3=1%
LFWLT60-CK metal cover kit accessory				

Connectors		
J1	Pin 1	AC NEUTRAL
	Pin 2	AC LINE
Spade Connector		EARTH
J2	Pin 1	V1
	Pin 2	V1
	Pin 3	RTN
	Pin 4	RTN
	Pin 5	V3
	Pin 6	V2
J3	Pin 1	+V1 SENSE
	Pin 2	-V1 SENSE

Notes

- For MWLT60-3003 efficiency is 75% typical.
- Single output models deliver 65 W, except MWLT60-1000 (50 W).
Triple output models deliver 60 W, except MWLT60-3003 (45 W).
- Maximum current per output channel. Do not exceed total output power rating.
- Ripple is peak to peak with 20 MHz bandwidth and 10 μ F (Tantalum capacitor) in parallel with a 0.1 μ F capacitor at rated line voltage and load ranges.
- Safety approved 47-63 Hz.
- Min Load specified to meet cross regulation.
- Add -II suffix to order Class II product.
- Specifications are for nominal input voltage, 25°C and max. load unless otherwise stated.
- Derate output power linearly to 80% from 90 VAC to 80 VAC input.
- Please refer mechanical outline drawing for height of component above and below PCB for -1xxx & 3xxx.
- When used in Cover Kit, de-rate output power to 70 % under all operating conditions.



Innovations in Power

Mechanical Specifications

AC Input Connector (J1)	Molex: 26-60-4030 or equivalent Mating: 09-50-3031; Pins: 08-50-0106
EARTH	Molex: 19705-4301 Mating: 190030001
DC Output Connector (J2)	Tyco: 640445-6 or equivalent Mating: 647402-6; Pins: 3-647409-1
Signal Connector (J3)	Molex: 22-23-2021 or equivalent Mating: 22-01-2021
Dimensions	4.0 x 2.0 x 1.2 inches (101.6 x 50.8 x 30.48 mm)
Weight	150 g

EMC*


Parameter	Conditions/Description	Criteria
Conducted Emissions	EN 55011-B, CISPR22-B, FCC PART15-B	Pass
Radiated Emissions	EN 55011 B	Pass
Input Current Harmonics	EN 61000-3-2	Class D
Voltage Fluctuation and Flicker	EN 61000-3-3	Pass
ESD Immunity	EN 61000-4-2	Level 4, Criterion A
Radiated Field Immunity	EN 61000-4-3	Level 3, Criterion A
Electrical Fast Transient Immunity	EN 61000-4-4	Level 3, Criterion A
Surge Immunity	EN 61000-4-5	Level 3, Criterion A
Conducted Immunity	EN 61000-4-6	Level 3, Criterion A
Magnetic Field Immunity	EN 61000-4-8	Level 4, Criterion A
Voltage dips, interruptions	EN 61000-4-11	Criterion A & B

Safety*

CE Mark	Complies with LVD Directive	
Approval Agency	Nemko, UL, C-UL	
Safety Standard(s)	EN60601-1, IEC60601-1 (ed.3), ANSI / AAMI ES 60601 - 1, CSA C22.2 No. 60601-1	
*Safety File Number(s)	Class I : Nemko: P16220642, NO90138	UL/C-UL: E173812
	Class II : Nemko: P13216630, NO73023	UL/C-UL: E173812

Derating Curve


Power de-rating

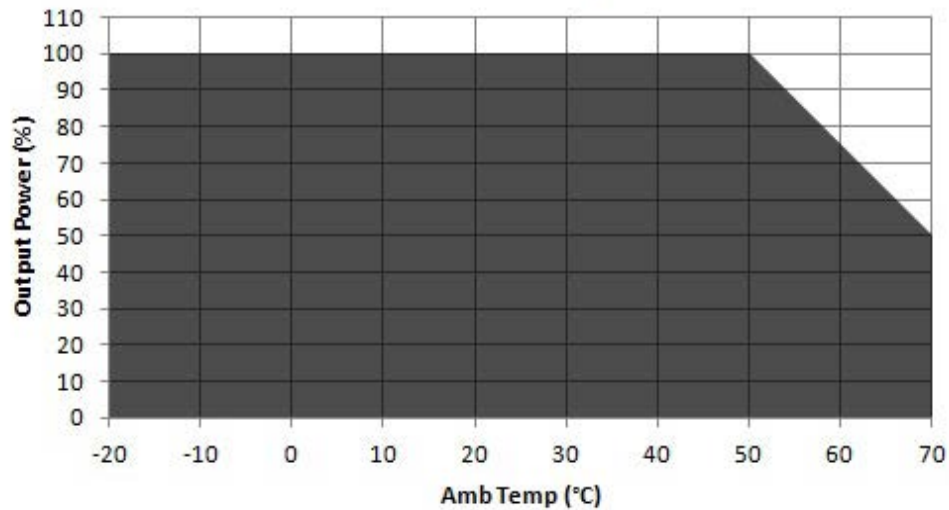

De-rate linearly from 100% at 50°C to 50% at 70°C


Mechanical Drawing

MWLT60 - 1xxx

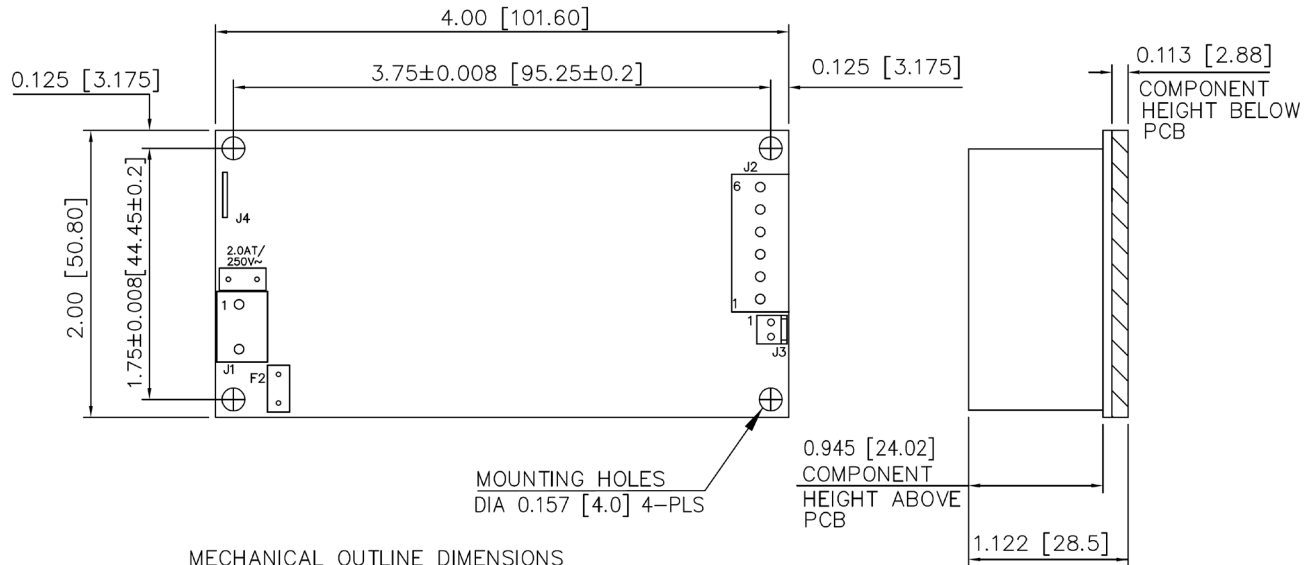

Mechanical Drawing

MWLT60 - 3xxx

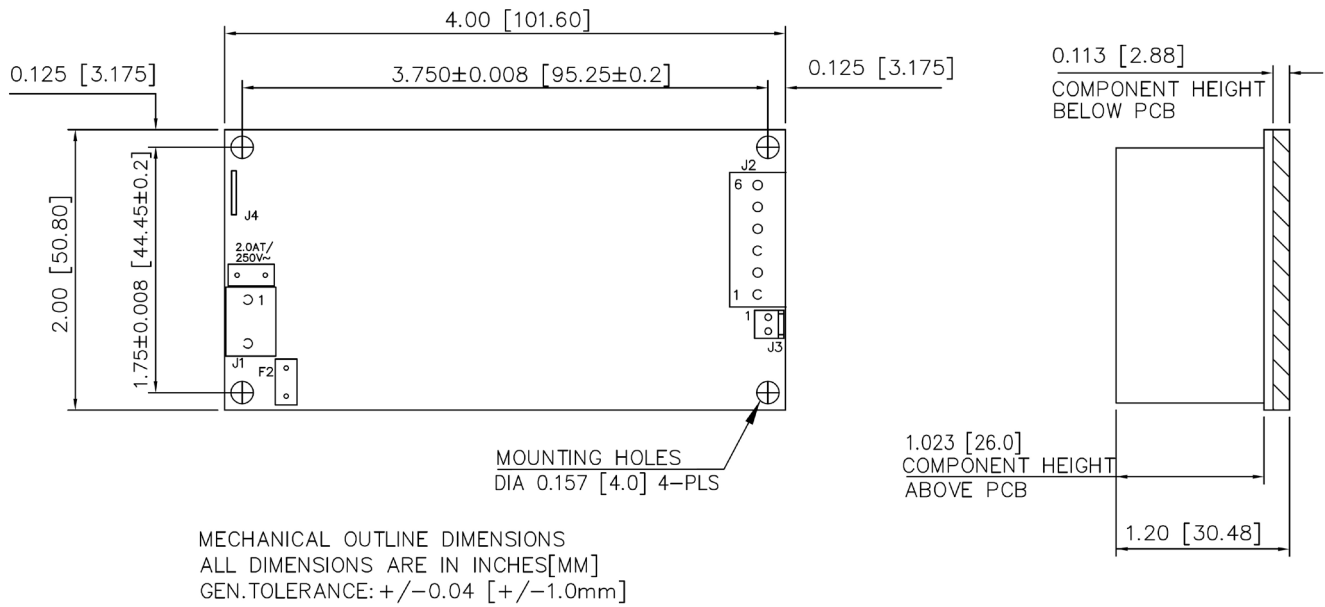

Notes: In case the PCB is mounted in a metal enclosure, using metal hardware ensure the following

1. Stand off, used to mount PCB has OD of 5.4 mm max.
2. Screws, used to fix PCB on stand off, have head dia of 6.0 mm max.
3. Washer, if used, to have dia of 6.5 mm max.